

LIXAS TATU

TRADIÇÃO EM ABRASIVOS



PRODUCT TECH SHEET

Applications


Suitable for the construction industry. Recommended for sanding wood, fillers, acrylic fillers, and similar materials. For manual use and orbital sanders only.

Composition & Technical Data

- **Abrasive:** White aluminum oxide;
- **Back:** 130 g/m² Monolucent Paper;
- **Adhesive:** Resin on Resin;
- **Layer:** Open;
- **Available grains:**

P80	P100	P120
P150	P180	P220
- **Conversion shapes (rolls):**

120mm x 45.000mm

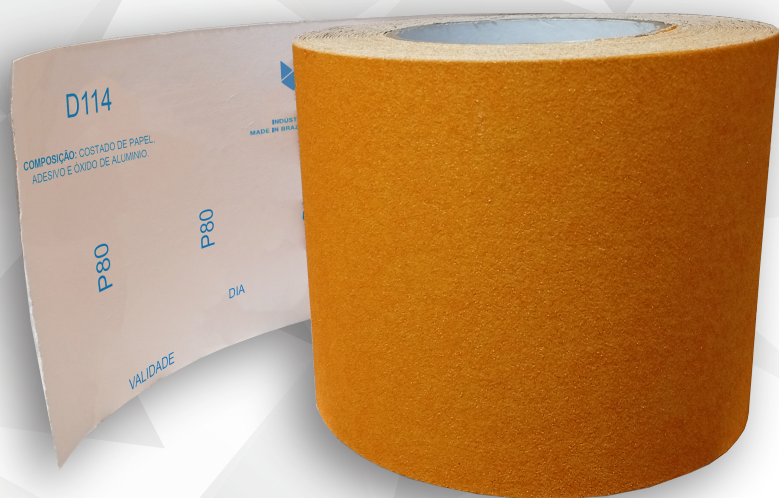

D114 SANDPAPER ROLL - MANUAL USE

D114 SANDPAPER ROLL - MANUAL USE

- We do not recommend using this product with water, as it is not waterproof.
- Always use an appropriate grain sequence to obtain the desired finish. As a general rule, for a better sandpaper finish/performance ratio, it is recommended to exclude only one grain in the sequence to be used, that is, if you are using a P80-grain sandpaper, you should skip the P100 and use the P120 in the sequence.

INSTRUCTIONS OF USE

STORAGE:

This product must be stored in its original packaging at a temperature between 15° and 27° C and relative humidity between 35% and 50% and away from floors, windows and damp places. Under the above conditions, the product validity is 5 years.